


SN54FB2033, SN74FB2033A 8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996


- Compatible With IEEE 1194.1-1991 (BTL) Standard
- TTL A Port, Backplane Transceiver Logic (BTL) \bar{B} Port
- Open-Collector \bar{B} -Port Outputs Sink 100 mA
- Isolated Logic-Ground and Bus-Ground Pins Reduce Noise
- BIAS V_{CC} Pin Minimizes Signal Distortion During Live Insertion or Withdrawal
- \bar{B} -Port Biasing Network Preconditions the Connector and PC Trace to the BTL High-Level Voltage
- TTL-Input Structures Incorporate Active Clamping Networks to Aid in Line Termination
- Package Options Include Plastic Quad Flat (RC) Package and Ceramic Flat (WD) Package

SN54FB2033 . . . WD PACKAGE
(TOP VIEW)

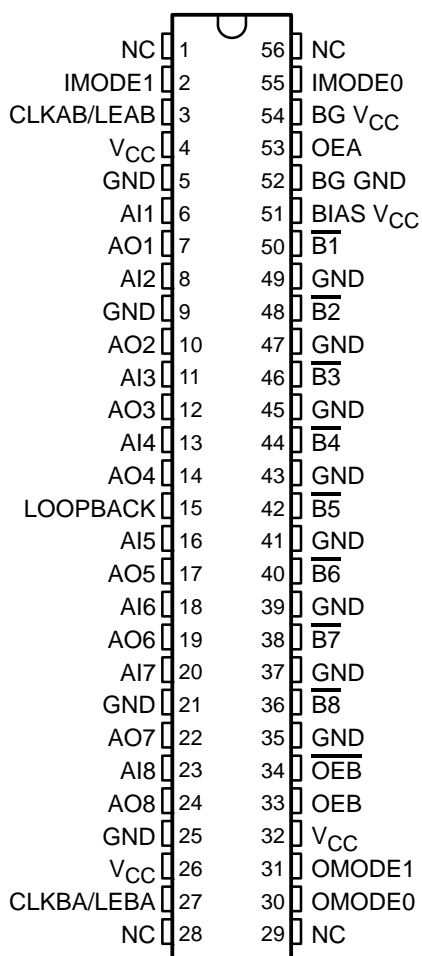

NC – No internal connection

SN74FB2033A . . . RC PACKAGE
(TOP VIEW)

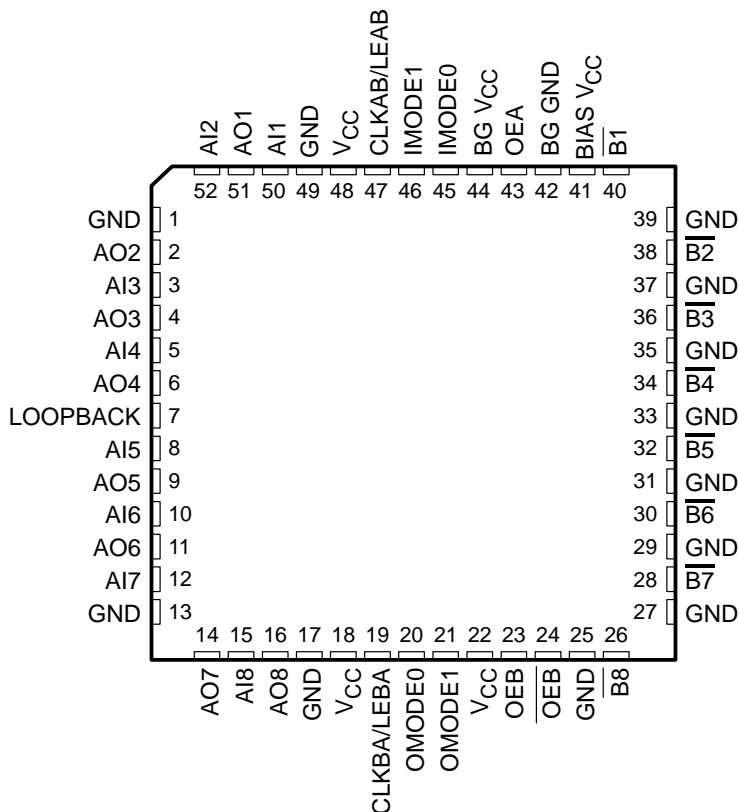

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1996, Texas Instruments Incorporated

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

description

The SN54FB2033 and SN74FB2033A are 8-bit transceivers featuring a split input (AI) and output (AO) bus on the TTL-level A port. The common-I/O, open-collector \bar{B} port operates at backplane transceiver logic (BTL) signal levels.

The logic element for data flow in each direction is configured by two mode inputs (IMODE1 and IMODE0 for B-to-A, OMODE1 and OMODE0 for A-to-B) as a buffer, a D-type flip-flop, or a D-type latch. When configured in the buffer mode, the inverted input data appears at the output port. In the flip-flop mode, data is stored on the rising edge of the appropriate clock input (CLKAB/LEAB or CLKBA/LEBA). In the latch mode, the clock inputs serve as active-high transparent latch enables.

Data flow in the B-to-A direction, regardless of the logic element selected, is further controlled by the LOOPBACK input. When LOOPBACK is low, \bar{B} -port data is the B-to-A input. When LOOPBACK is high, the output of the selected A-to-B logic element (prior to inversion) is the B-to-A input.

The AO port-enable/-disable control is provided by OEA. When OEA is low or when V_{CC} is less than 2.5 V, the AO port is in the high-impedance state. When OEA is high, the AO port is active (high or low logic levels).

The \bar{B} port is controlled by OEB and \overline{OEB} . If OEB is low, \overline{OEB} is high, or V_{CC} is less than 2.5 V, the \bar{B} port is inactive. If OEB is high and \overline{OEB} is low, the \bar{B} port is active.

BG V_{CC} and BG GND are the bias-generator reference inputs.

The A-to-B and B-to-A logic elements are active, regardless of the state of their associated outputs. The logic elements can enter new data (in flip-flop and latch modes) or retain previously stored data while the associated outputs are in the high-impedance (AO port) or inactive (\bar{B} port) states.

Output clamps are provided on the BTL outputs to reduce switching noise. One clamp reduces inductive ringing effects on V_{OH} during a low-to-high transition. The other clamps out ringing below the BTL V_{OL} voltage of 0.75 V. Both clamps are active only during ac switching and do not affect the BTL outputs during steady-state conditions.

BIAS V_{CC} establishes a voltage between 1.62 V and 2.1 V on the BTL outputs when V_{CC} is not connected.

The SN54FB2033 is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74FB2033A is characterized for operation from 0°C to 70°C .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

Function Tables

FUNCTION/MODE								FUNCTION/MODE
INPUTS								
OEA	OEB	OEB	OMODE1	OMODE0	IMODE1	IMODE0	LOOPBACK	
L	L	X	X	X	X	X	X	Isolation
L	X	H	X	X	X	X	X	
X	H	L	L	L	X	X	X	AI to \overline{B} , buffer mode
X	H	L	L	H	X	X	X	AI to \overline{B} , flip-flop mode
X	H	L	H	X	X	X	X	AI to \overline{B} , latch mode
H	L	X	X	X	L	L	L	\overline{B} to AO, buffer mode
H	X	H	X	X	L	L	L	
H	L	X	X	X	L	H	L	\overline{B} to AO, flip-flop mode
H	X	H	X	X	L	H	L	
H	L	X	X	X	H	X	L	\overline{B} to AO, latch mode
H	X	H	X	X	H	X	L	
H	L	X	X	X	L	L	H	AI to AO, buffer mode
H	X	H	X	X	L	L	H	
H	L	X	X	X	L	H	H	AI to AO, flip-flop mode
H	X	H	X	X	L	H	H	
H	L	X	X	X	H	X	H	AI to AO, latch mode
H	X	H	X	X	H	X	H	
H	H	L	X	X	X	X	L	AI to \overline{B} , \overline{B} to AO



TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

Function Tables (Continued)

ENABLE/DISABLE

INPUTS			OUTPUTS	
OEA	OEB	$\overline{\text{OEB}}$	AO	$\overline{\text{B}}$
L	X	X	Hi Z	
H	X	X	Active	
X	L	L		Inactive (H)
X	L	H		Inactive (H)
X	H	L		Active
X	H	H		Inactive (H)

BUFFER

INPUT	OUTPUT
L	H
H	L

LATCH

INPUTS		OUTPUT
CLK/LE	DATA	
H	L	H
H	H	L
L	X	Q_0

LOOPBACK

LOOPBACK	Q^\dagger
L	$\overline{\text{B}}$ port
H	Point P^\ddagger

$^\dagger Q$ is the input to the B-to-A logic element.

$^\ddagger P$ is the output of the A-to-B logic element (see functional block diagram).

SELECT

INPUTS		SELECTED LOGIC ELEMENT
MODE1	MODE0	
L	L	Buffer
L	H	Flip-flop
H	X	Latch

FLIP-FLOP

INPUTS		OUTPUT
CLK/LE	DATA	
L	X	Q_0
\uparrow	L	H
\uparrow	H	L




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54FB2033, SN74FB2033A 8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

functional block diagram

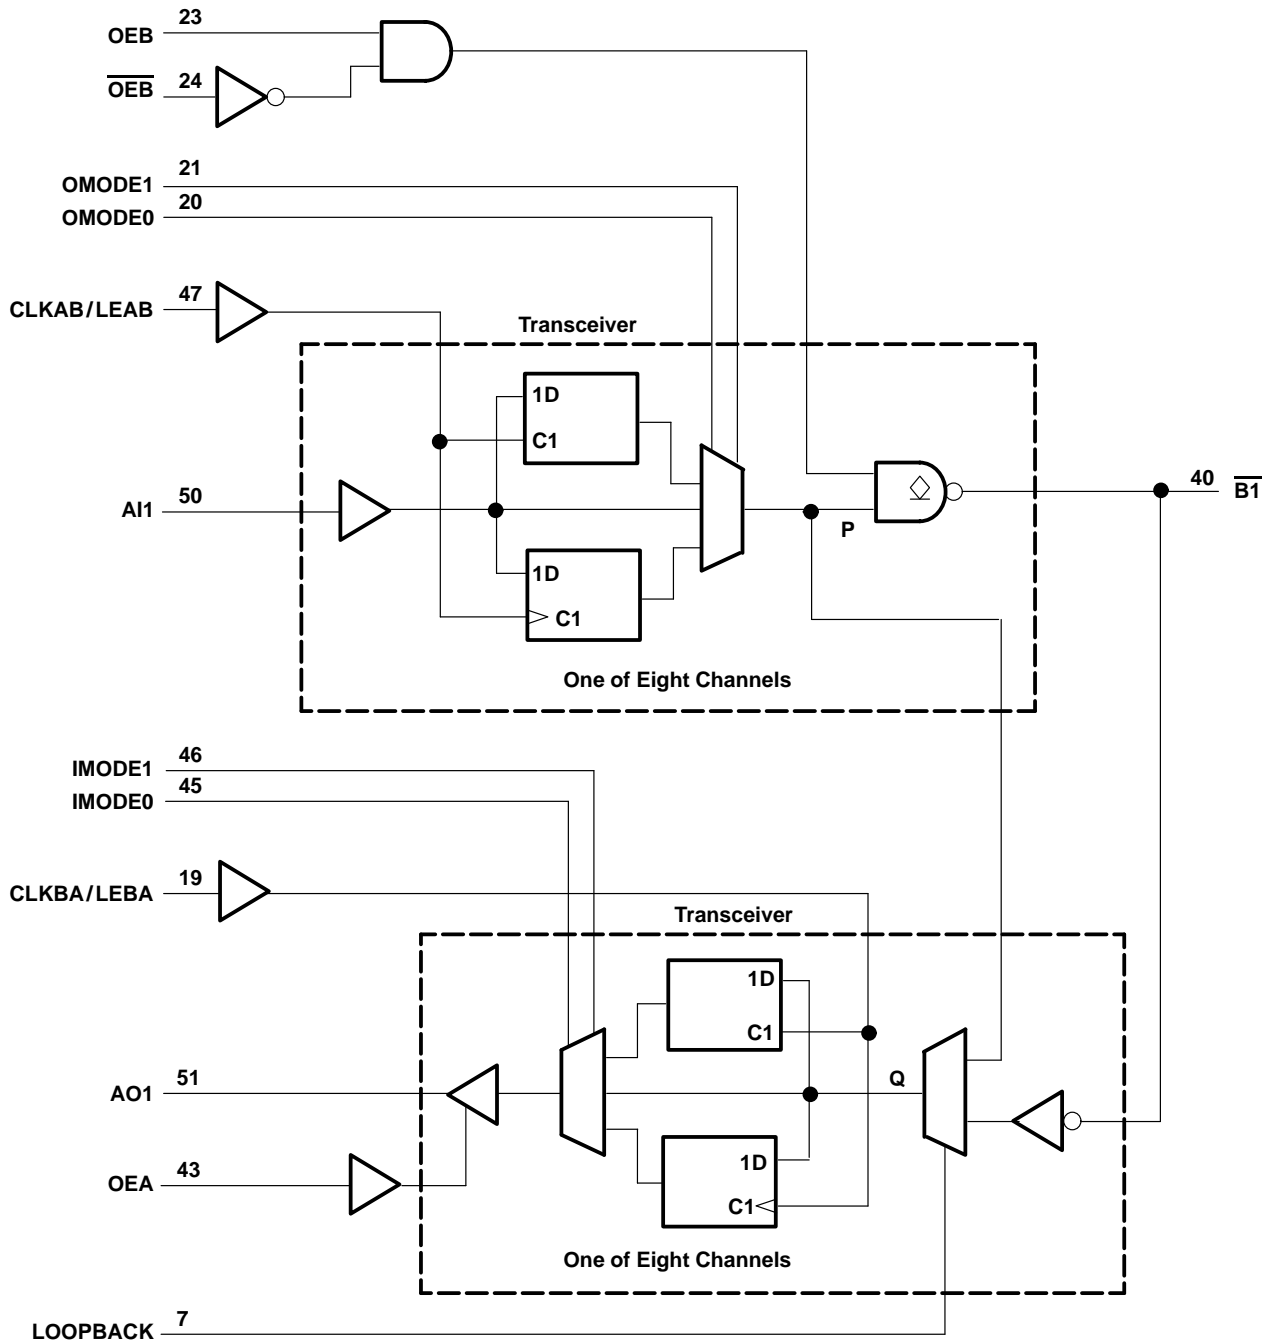

Pin numbers shown are for the RC package.

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	–0.5 V to 7 V
Voltage range applied to any \overline{B} output in the disabled or power-off state, V_O	–0.5 V to 3.5 V
Voltage range applied to any output in the high state, V_O : A port	–0.5 V to V_{CC}
Input clamp current, V_I : Except \overline{B} port	–1.2V to 7V
\overline{B} port	–1.2V to 3.5V
Input clamp current, I_{IK} : Except \overline{B} port	–40 mA
\overline{B} port	–18 mA
Current applied to any single output in the low state, I_O : A port	48 mA
Maximum power dissipation at $T_A = 55^\circ\text{C}$ (in still air) (see Note 1): RC package	1.4 W
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 75 mils.

recommended operating conditions (see Note 2)

			SN54FB2033			SN74FB2033A			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC} , BG V_{CC}	Supply voltage		4.75	5	5.25	4.75	5	5.25	V
BIAS V_{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	\overline{B} port	1.62*		2.3	1.62		2.3	V
		Except \overline{B} port	2			2			
V_{IL}	Low-level input voltage	\overline{B} port	0.75		1.47*	0.75		1.47	V
		Except \overline{B} port			0.8			0.8	
I_{OH}	High-level output current	AO port			–3			–3	mA
I_{OL}	Low-level output current	AO port			24			24	mA
		\overline{B} port			100			100	
$\Delta t/\Delta v$	Input transition rise or fall rate	Except \overline{B} port			10			10	ns/V
T_A	Operating free-air temperature		–55		125	0		70	°C

* On products compliant to MIL-PRF-38535, this parameter is based on characterization data but is not tested.

NOTE 2: Unused pins (input or I/O) must be held high or low to prevent them from floating.

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54FB2033			SN74FB2033A			UNIT
				MIN	TYP†	MAX	MIN	TYP†	MAX	
V _{IK}		V _{CC} = 4.75 V, I _I = −18 mA		−1.2			−1.2			V
V _{OH}	AO port	V _{CC} = 4.75 V to 5.25 V, I _{OH} = −10 μA		V _{CC} − 1			V _{CC} − 1.1			V
		V _{CC} = 4.75 V	I _{OH} = −3 mA	2.5	2.85	3.4	2.5	2.85	3.4	
			I _{OH} = −32 mA	2			2			
V _{OL}	AO port	V _{CC} = 4.75 V	I _{OL} = 20 mA	0.33		0.5	0.33		0.5	V
			I _{OL} = 55 mA	0.8		0.8				
	B̄ port	V _{CC} = 4.75 V	I _{OL} = 100 mA	0.75	1.1		0.75	1.1		
			I _{OL} = 4 mA	0.5		0.5				
I _I	Except B̄ port	V _{CC} = 0, V _I = 5.25 V		100			100			μA
I _{IH}	Except B̄ port	V _{CC} = 5.25 V, V _I = 2.7 V		50			50			μA
	B̄ port‡	V _{CC} = 0 to 5.25 V, V _I = 2.1 V		100			100			
I _{IL}	Except B̄ port	V _{CC} = 5.25 V, V _I = 0.5 V		−50			−50			μA
	B̄ port‡	V _{CC} = 5.25 V, V _I = 0.75 V		−100			−100			
I _{OH}	B̄ port	V _{CC} = 0 to 5.25 V, V _O = 2.1 V		100			100			μA
I _{OZH}	AO port	V _{CC} = 5.25 V, V _O = 2.7 V		50			50			μA
I _{OZL}	AO port	V _{CC} = 5.25 V, V _O = 0.5 V		−50			−50			μA
I _{OS} §	AO port	V _{CC} = 5.25 V, V _O = 0		−40	−80	−150	−40	−80	−150	mA
I _{CC}	All outputs on	V _{CC} = 5.25 V, I _O = 0		45		90	45		70	mA
C _i	AI port and control inputs	V _I = 0.5 V or 2.5 V		9.5			5			pF
C _O	AO port	V _O = 0.5 V or 2.5 V		9			5			pF
C _{io} ¶	B̄ port per P1194.0	V _{CC} = 0 to 4.75 V		8#			6			pF
		V _{CC} = 4.75 V to 5.25 V		8#			6			

† All typical values are at $V_{CC} = 5\text{ V}$.

‡ For I/O ports, the parameters I_{IH} and I_{IL} include the off-state output current.

§ Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

¶ Parameter is based on characterization data but is not tested.

Parameter does not meet P1194.0 specification.

live-insertion characteristics over recommended operating free-air temperature range (see Note 3)

PARAMETER		TEST CONDITIONS		SN54FB2033		SN74FB2033A		UNIT
				MIN	MAX	MIN	MAX	
I _{CC} (BIAS V _{CC})		V _{CC} = 0 to 4.5 V	V _B =0 to 2V, V _I (BIAS V _{CC}) = 4.5 V to 5.5 V	10		10		μA
		V _{CC} = 4.5 V to 5.5 V		10		10		μA
V _O	B̄ port	V _{CC} = 0, V _I (BIAS V _{CC}) = 4.5 V to 5.5 V		1.62	2.1	1.62	2.1	V
I _O	B̄ port	V _{CC} = 0, V _B = 1 V, V _I (BIAS V _{CC}) = 4.5 V to 5.5 V		−30		−1		μA
		V _{CC} = 0 to 5.5 V, OEB = 0 to 0.8 V		170		100		
		V _{CC} = 0 to 2.2 V, OEB = 0 to 5 V		100		100		

NOTE 3: The power-up sequence is: GND, BIAS V_{CC} , V_{CC} .

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 2)

		SN54FB2033				SN74FB2033A				UNIT
		$V_{CC} = 5\text{ V},$ $T_A = 25^{\circ}\text{C}$		MIN	MAX	$V_{CC} = 5\text{ V},$ $T_A = 25^{\circ}\text{C}$		MIN	MAX	
		MIN	MAX			MIN	MAX			
f_{clock}	Clock frequency	0	150	0	150	0	150	0	150	MHz
t_w	Pulse duration, CLKAB/LEAB or CLKBA/LEBA	3.9		4.3		3.3		3.3		ns
t_{su}	Setup time, data before CLKAB/LEAB or CLKBA/LEBA↑	2.9		3.3		2.7		2.7		ns
t_h	Hold time, data after CLKAB/LEAB or CLKBA/LEBA↑	1		1.3		0.7		0.7		ns



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54FB2033, SN74FB2033A

8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 2)

PARAMETER		FROM (INPUT)	TO (OUTPUT)	SN54FB2033				SN74FB2033A				UNIT		
				V _{CC} = 5 V, T _A = 25°C			MIN	MAX	V _{CC} = 5 V, T _A = 25°C				MIN	MAX
				MIN	TYP	MAX			MIN	TYP	MAX			
f _{max}				150			150		150			150		MHz
t _{PLH}		AI (through mode)	\overline{B}	1.7	3.8	4.6	1.2	7.5	2.3	3.6	4.6	2.3	5.6	ns
t _{PHL}				1.3	2.6	4.3	1	5.5	1.9	3	4.2	1.9	4.5	
t _{PLH}		\overline{B} (through mode)	AO	2.5	3.9	5.9	1.4	7.6	2.5	4.2	5.5	2.5	6.1	ns
t _{PHL}				2.7	5.2	5.7	1.6	7.8	3	4.2	5.6	3	5.7	
t _{PLH}		AI (transparent)	\overline{B}	1.7	5	4.6	1.2	8.7	2.3	3.6	4.6	2.3	5.6	ns
t _{PHL}				1.3	3.6	4.3	1	5.9	1.9	3	4.1	1.9	4.5	
t _{PLH}		\overline{B} (transparent)	AO	2.5	4.3	5.8	1.5	7.8	2.5	4.2	5.5	2.5	6.1	ns
t _{PHL}				2.7	5.6	5.7	1.6	8	3	4.2	5.6	3	5.7	
t _{PLH}		OEB	\overline{B}	1.6	3.7	4.7	1.1	6.6	2.4	3.7	4.7	2.4	5.8	ns
t _{PHL}				1.2	2.6	4.1	0.4	5.4	1.8	3	4.1	1.8	4.4	
t _{PLH}		\overline{OEB}	\overline{B}	1.3	3.8	4.3	1.2	6.6	2	3.4	4.3	2	5.2	ns
t _{PHL}				1.2	2.9	4.4	0.8	5.5	2	3.3	4.4	2	4.8	
t _{PZH}		OEA	AO	2	3.5	5.1	1.2	6.6	2	3.5	4.6	2	5.1	ns
t _{PZL}				2.7	4.3	6.1	1.3	7.7	2.7	4.2	5.1	2.7	5.4	
t _{PHZ}		OEA	AO	2.1	3.5	5.8	1.1	6.9	2.1	4	5	2.1	5.5	ns
t _{PLZ}				1.6	2.7	4.7	1	6	1.6	2.8	3.9	1.6	4.3	
t _{PLH}		CLKAB/ LEAB	\overline{B}	2.1	5	5.8	1.6	8.7	3	4.7	5.8	3	6.9	ns
t _{PHL}				2	3.6	5.6	1.1	6.6	2.8	4.3	5.6	2.8	6.1	
t _{PLH}		CLKBA/ LEBA	AO	2	3.8	5.4	1.4	6.7	2	3.6	4.9	2	5.4	ns
t _{PHL}				2.2	4.1	5.6	1.5	6.5	2.2	3.5	4.7	2.2	5.1	
t _{PLH}		OMODE	\overline{B}	2.3	4.8	6.1	1.6	8.1	2.4	5	6.1	2.4	7.2	ns
t _{PHL}				1.4	3.5	6	1	6.5	2.4	4.5	6	2.4	6.7	
t _{PLH}		IMODE	AO	1.8	3.6	5.9	1.3	7.3	1.8	4	5.3	1.8	5.9	ns
t _{PHL}				2.3	4.1	5.4	1.4	6.4	2.3	4.1	5.2	2.3	5.4	
t _{PLH}		LOOPBACK	AO	2.4	4.6	7.1	1.6	8.3	2.4	5	7	2.4	8	ns
t _{PHL}				3.1	4.8	6.9	1.8	7.5	3.1	4.6	5.7	3.1	5.9	
t _{PLH}		AI	AO	1.9	3.7	5.7	1.4	7.1	1.9	3.7	5.5	1.9	6.1	ns
t _{PHL}				2.6	4.3	5.8	1.6	7.3	2.6	4.2	5.6	2.6	5.8	
t _r	Rise time, 1.3 V to 1.8 V, \overline{B} port			0.5	1.5	2.1	0.4	3.2	0.5	1.2	2.1	0.5	3	ns
t _f	Fall time, 1.8 V to 1.3 V, \overline{B} port			0.4	1.5	2.3	0.4	3.4	0.5	1.4	2.3	0.5	3	ns
t _r	Rise time, 10% to 90%, AO			2	3.5	4.2	1.8	5.4	2	3.3	4.2	2	5	ns
t _f	Fall time, 90% to 10%, AO			1	2.5	3.4	0.8	5.1	1	2.5	3.4	1	5	ns
\overline{B} -port input pulse rejection							1*					1		ns

* On products compliant to MIL-PRF-38535, this parameter is based on characterization data but is not tested.

SN54FB2033, SN74FB2033A
8-BIT TTL/BTL REGISTERED TRANSCEIVERS

SCBS174F – NOVEMBER 1991 – REVISED AUGUST 1996

output-voltage characteristics

PARAMETER		TEST CONDITIONS	SN54FB2033		SN74FB2033A		UNIT
			MIN	MAX	MIN	MAX	
V_{OHP}^{\dagger}	Peak output voltage during turnoff of 100 mA into 40 nH	See Figure 1	4		4.5		V
V_{OHV}^{\dagger}	Minimum output voltage during turnoff of 100 mA into 40 nH		1.62		1.62		V
V_{OLV}	Minimum output voltage during high-to-low switch	$I_{OL} = -50\text{ mA}$	0.3		0.3		V

[†] Parameter is based on characterization data but is not tested.

PARAMETER MEASUREMENT INFORMATION



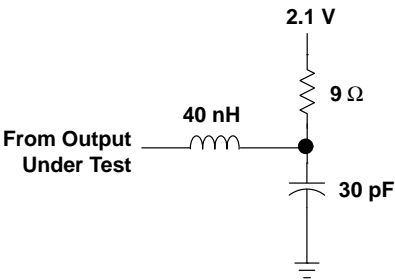


Figure 1. Load Circuit for V_{OHP} , V_{OHV}

PARAMETER MEASUREMENT INFORMATION

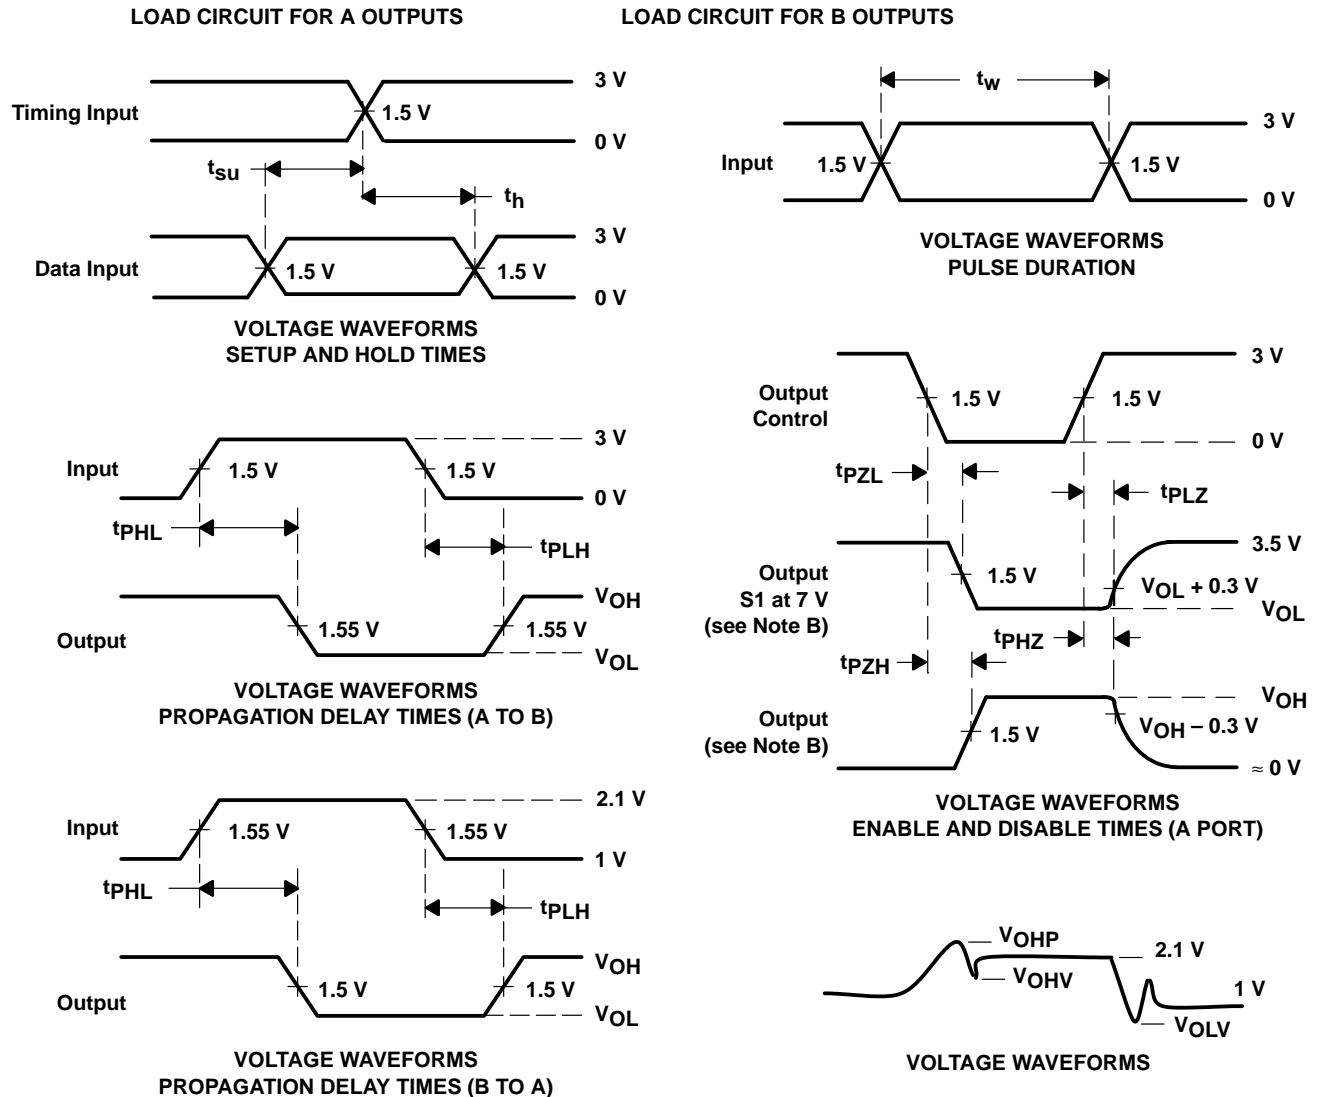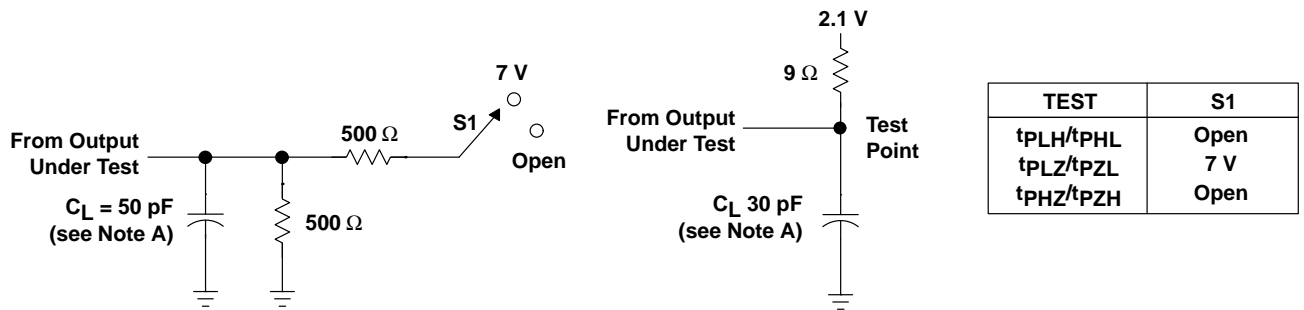

- NOTES:
- C_L includes probe and jig capacitance.
 - Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - All input pulses are supplied by generators having the following characteristics: TTL inputs: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$; BTL inputs: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$.
 - The outputs are measured one at a time with one transition per measurement.

Figure 2. Load Circuits and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.