

SN54LS594, SN54LS599, SN74LS594, SN74LS599 8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES


SDLS005

D2747, JUNE 1983 — REVISED MARCH 1988

- 8-Bit Serial-In, Parallel-Out Shift Registers with Storage
- Choice of Output Configurations:
'LS594 ... Buffered
'LS599 ... Open-Collector
- Guaranteed Shift Frequency:
DC to 20 MHz
- Independent Direct-Overriding Clears on Shift and Storage Registers
- Independent Clocks for Both Shift and Storage Registers


SN54LS594, SN54LS599 ... J OR W PACKAGE
SN74LS594, SN74LS599 ... N PACKAGE

(TOP VIEW)

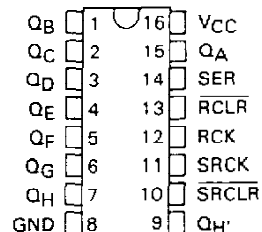

SN54LS594, SN54LS599 ... FK PACKAGE

(TOP VIEW)

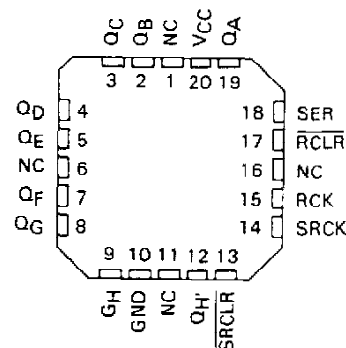


description

These devices each contain an 8-bit D-type storage register. The storage register has buffered ('LS594) or open-collector ('LS599) outputs. Separate clocks and direct-overriding clears are provided on both the shift and storage registers. A shift output (Q_H') is provided for cascading purposes.

Both the shift register and the storage register clocks are positive-edge triggered. If the user wishes to connect both clocks together, the shift register will always be one clock pulse ahead of the storage register.

NC — No internal connection

schematics of inputs and outputs

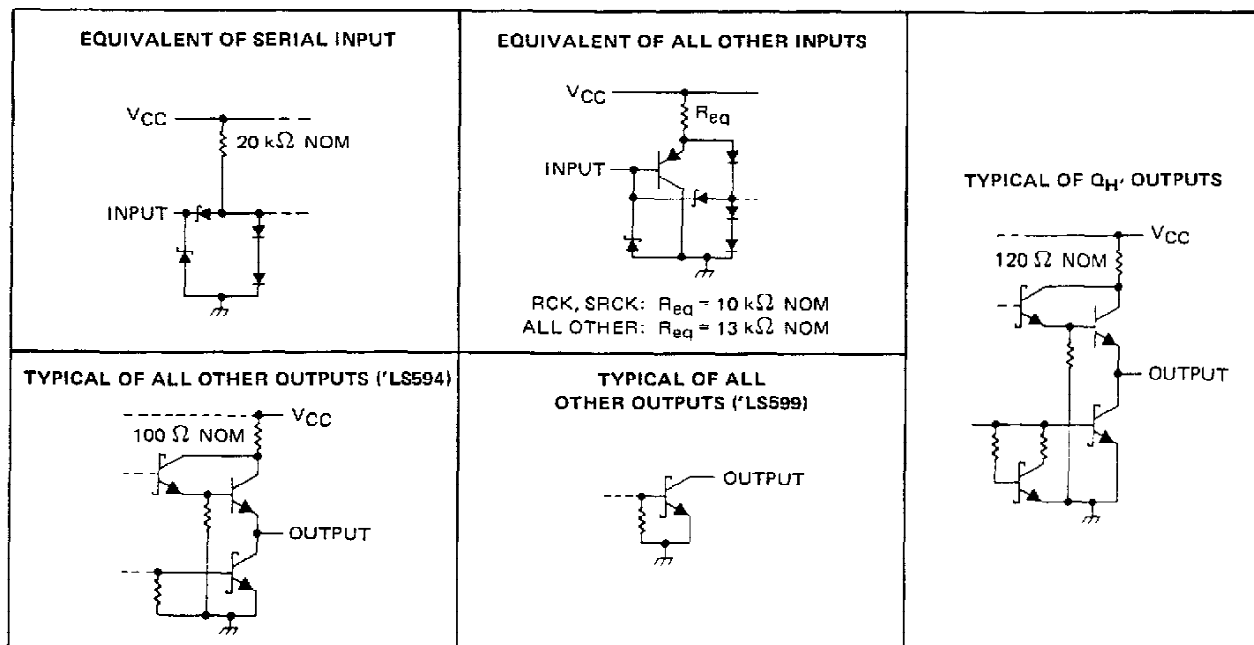


PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS594, SN54LS599, SN74LS594, SN74LS599 **8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES**

logic diagram (positive logic)

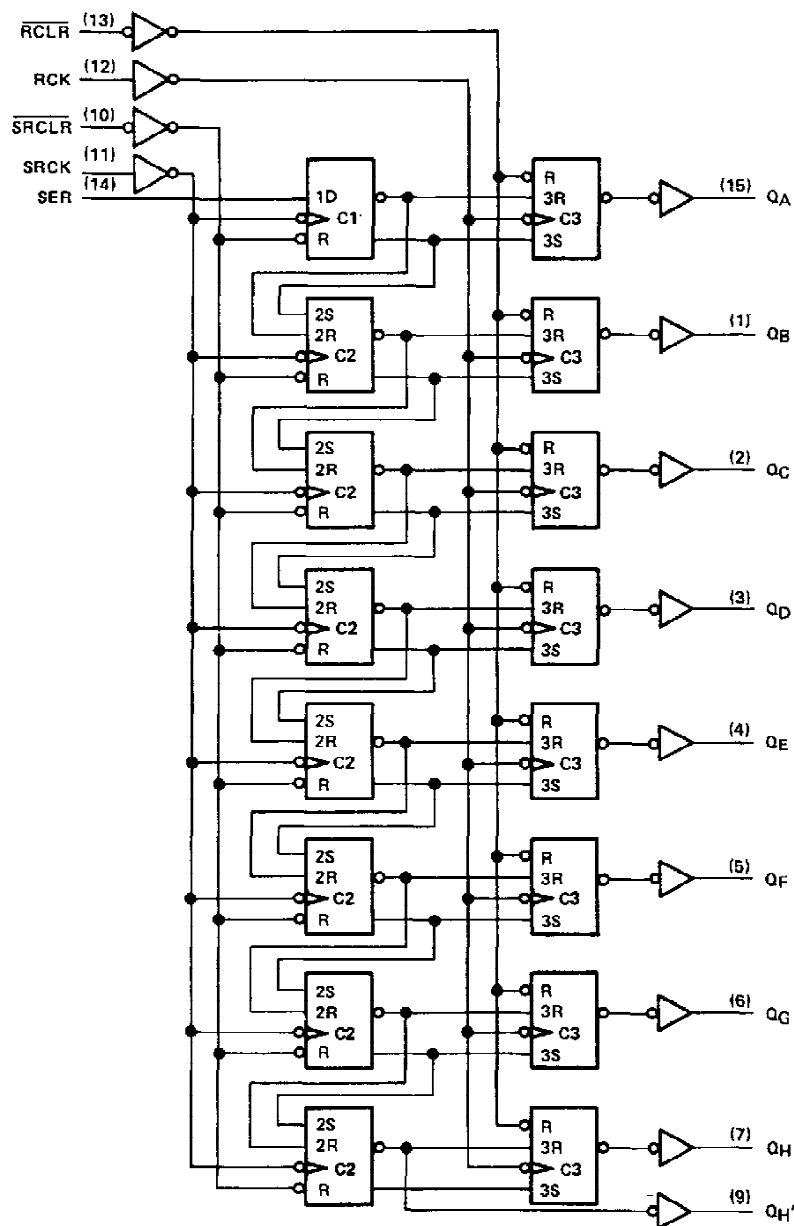


Pin numbers shown are for J, N, and W packages.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS594, SN54LS599, SN74LS594, SN74LS599 8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES

logic symbols†

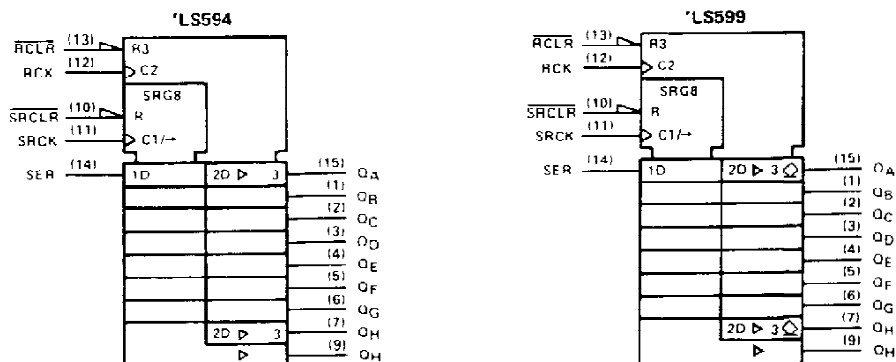

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for J, N, and W packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	7 V
Off-state output voltage	5.5 V
Operating free-air temperature range: SN54LS594, SN54LS599	– 55°C to 125°C
SN74LS594, SN74LS599	0°C to 70°C
Storage temperature range	– 65°C to 150°C

NOTE 1: Voltage values are with respect to the network ground terminal.

recommended operating conditions

			SN54LS [†]			SN74LS [†]			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage				0.7			0.8	V
V _{OH}	High-level output voltage	Q _A thru Q _H , 'LS599 only			5.5			5.5	V
I _{OH}	High-level output current	Q _H [†]			– 1			– 1	mA
		Q _A thru Q _H , 'LS594 only			– 1			– 2.6	
I _{OL}	Low-level output current	Q _H [†]			8			16	mA
		Q			12			24	
f _{SRCK}	Shift clock frequency		0		20	0		20	MHz
f _{RCK}	Register clock frequency		0		25	0		25	MHz
t _w (SRCK)	Duration of shift clock pulse		25			25			ns
t _w (RCK)	Duration of register clock pulse		20			20			ns
t _w (SRCLR)	Duration of shift clear pulse, low level		20			20			ns
t _w (RCLR)	Duration of register clear pulse, low level		35			35			ns
t _{su}	Setup time	SRCLR inactive before SRCK†	20			20			ns
		SER before SRCK†	20			20			
		SRCK† before RCK† (see Note 2)	40			40			
		SRCLR low before RCK†	40			40			
		RCLR high before RCK†	20			20			
t _h	Hold time	SER after SRCK†	0			0			ns
T _A	Operating free-air temperature		– 55		125	0		70	°C

NOTE 2: This setup time ensures the register will see stable data from the shift-register outputs. The clocks may be connected together, in which case the storage register state will be one clock pulse behind the shift register.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS594, SN54LS599, SN74LS594, SN74LS599

8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS †		SN54LS'			SN74LS'			UNIT
				MIN	TYP ‡	MAX	MIN	TYP ‡	MAX	
V _{IK}		V _{CC} = MIN, I _I = -18 mA				-1.5			-1.5	V
V _{OH}	'LS594 Q	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX	I _{OH} = -1 mA	2.4	3.2					V
			I _{OH} = -2.6 mA				2.4	3.1		
	Q _H '		I _{OH} = -1 mA	2.4	3.2		2.4	3.2		
I _{OH}	'LS599 Q	V _{CC} = MIN, V _{IH} = 2 V, V _{OH} = 5.5 V, V _{IL} = MAX				0.1			0.1	mA
V _{OL}	Q	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX	I _{OL} = 12 mA	0.25	0.4		0.25	0.4		V
			I _{OL} = 24 mA				0.35	0.5		
			I _{OL} = 8 mA	0.25	0.4		0.25	0.4		
	Q _H '		I _{OL} = 16 mA				0.35	0.5		
I _I		V _{CC} = MAX, V _I = 7 V				0.1			0.1	mA
I _{IH}		V _{CC} = MAX, V _I = 2.7 V				20			20	μA
I _{IL}	SER	V _{CC} = MAX, V _I = 0.4 V				-0.4			-0.4	mA
	All others					-0.2			-0.2	
I _{OS} §	'LS594 Q	V _{CC} = MAX, V _O = 0		-30	-130		-30	-130		mA
	Q _I '			-20	-100		-20	-100		
I _{CCH}	'LS594	V _{CC} = MAX, All possible inputs grounded, All outputs open		34	50		34	50		mA
	'LS599			30	45		30	45		
I _{CCL}	'LS594			42	65		42	65		mA
	'LS599			38	55		38	55		

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

switching characteristics, V_{CC} = 5 V, T_A = 25°C, (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS594			'LS599			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
t _{PLH}	SRCK↑	Q _H '	R _L = 1 kΩ, C _L = 30 pF	12	18		12	18		ns
t _{PHL}				15	23		17	25		ns
t _{PLH}	RCK↑	Q _A thru Q _H	R _L = 667 Ω, C _L = 45 pF	12	18		28	42		ns
t _{PHL}				20	30		24	35		ns
t _{PHL}	SRCLR↓	Q _H '	R _L = 1 kΩ, C _L = 30 pF	22	33		24	35		ns
t _{PHL}	RCLR↓	Q _A thru Q _H	R _L = 667 Ω, C _L = 45 pF	38	57		40	60		ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.