


- Bus Transceivers/Registers
- Independent Registers and Enables for A and B Buses
- Multiplexed Real-Time and Stored Data
- Choice of True and Inverting Data Paths
- Choice of 3-State or Open-Collector Outputs to A Bus
- Dependable Texas Instruments Quality and Reliability

DEVICE	A OUTPUT	B OUTPUT	LOGIC
'LS651	3-State	3-State	Inverting
'LS652	3-State	3-State	True
'LS653	Open-collector	3-State	Inverting


description

These devices consist of bus transceiver circuits, D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the data bus or from the internal storage registers. Enable GAB and $\bar{G}BA$ are provided to control the transceiver functions. SAB and SBA control pins are provided to select whether realtime or stored data is transferred. A low input level selects real-time data, and a high selects stored data. The following examples demonstrate the four fundamental bus-management functions that can be performed with the 'LS651, 'LS652, and 'LS653.


SN54LS'...JT PACKAGE
 SN74LS'...DW OR NT PACKAGE
 (TOP VIEW)



SN54LS'...FK PACKAGE
 (TOP VIEW)

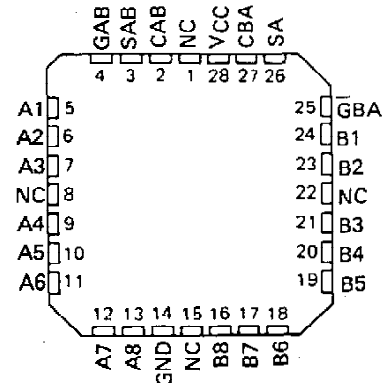


NC — No internal connection

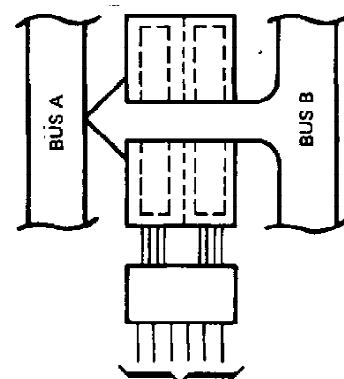

GAB $\bar{G}BA$ CAB CBA SAB SBA
 L L X X X L

REAL-TIME TRANSFER
 BUS B TO BUS A

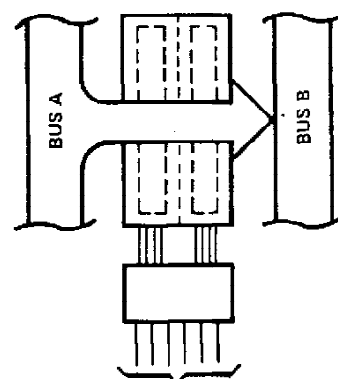

GAB $\bar{G}BA$ CAB CBA SAB SBA
 H H X X L X


REAL-TIME TRANSFER
 BUS A TO BUS B

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS


POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54LS651 THRU SN54LS653
SN74LS651 THRU SN74LS653
OCTAL BUS TRANSCEIVERS AND REGISTERS**

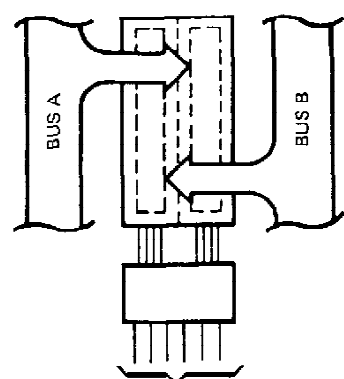

GAB	$\overline{\text{GBA}}$	CAB	CBA	SAB	SBA
X	H	↑	X	X	X
L	X	X	↑	X	X
L	H	↑	↑	X	X

STORAGE FROM
A AND/OR B

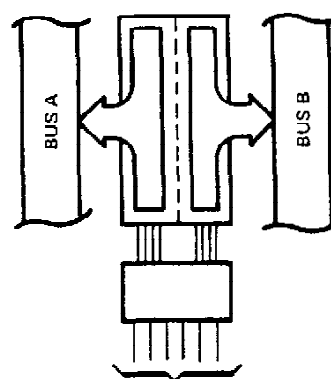

GAB	$\overline{\text{GBA}}$	CAB	CBA	SAB	SBA
H	L	H or L	H or L	H	H

TRANSFER
STORED DATA
TO A AND/OR B

Data on the A or B data bus, or both, can be stored in the internal D flip-flop by low-to-high transitions at the appropriate clock pins (CAB or CBA) regardless of the select or enable control pins. When SAB or SBA are in the real-time transfer mode, it is also possible to store data without using the internal D-type flip-flops by simultaneously enabling GAB and $\overline{\text{GBA}}$. In this configuration each output reinforces its input. Thus, when all other data sources to the two sets of bus lines are at high impedance, each set of bus lines will remain at its last state.

The SN54LS651 through SN54LS653 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74LS651 through SN74LS653 are characterized for operation from 0°C to 70°C .

FUNCTION TABLE

INPUTS						DATA I/O*		OPERATION OR FUNCTION	
GAB	$\overline{\text{GBA}}$	CAB	CBA	SAB	SBA	A1 THRU A8	B1 THRU B8	'LS651, 'LS653	'LS652, 'LS654
L	H	H or L	H or L	X	X	Input	Input	Isolation	Isolation
L	H	↑	↑	X	X	Input	Input	Store A and B Data	Store A and B Data
X	H	↑	H or L	X	X	Input	Not specified	Store A, Hold B	Store A, Hold B
H	H	↑	↑	X	X	Input	Output	Store A in both registers	Store A in both registers
L	X	H or L	↑	X	X	Not specified	Input	Hold A, Store B	Hold A, Store B
L	L	↑	↑	X	X	Output	Input	Store B in both registers	Store B in both registers
L	L	X	X	X	L	Output	Input	Real-Time $\overline{\text{B}}$ Data to A Bus	Real-Time B Data to A Bus
L	L	X	H or L	X	H	Output	Input	Stored $\overline{\text{B}}$ Data to A Bus	Stored B Data to A Bus
H	H	X	X	L	X	Input	Output	Real-Time $\overline{\text{A}}$ Data to B Bus	Real-Time A Data to B Bus
H	H	H or L	X	H	X	Input	Output	Stored $\overline{\text{A}}$ Data to B Bus	Stored A Data to B Bus
H	L	H or L	H or L	H	H	Output	Output	Stored $\overline{\text{A}}$ Data to B Bus and Stored $\overline{\text{B}}$ Data to A Bus	Stored A Data to B Bus and Stored B Data to A Bus



* The data output functions may be enabled or disabled by various signals at the GAB and $\overline{\text{GBA}}$ inputs. Data input functions are always enabled, i.e., data at the bus pins will be stored on every low-to-high transition on the clock inputs.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54LS651 THRU SN54LS653
SN74LS651 THRU SN74LS653
OCTAL BUS TRANSCEIVERS AND REGISTERS**


logic diagrams (positive logic)

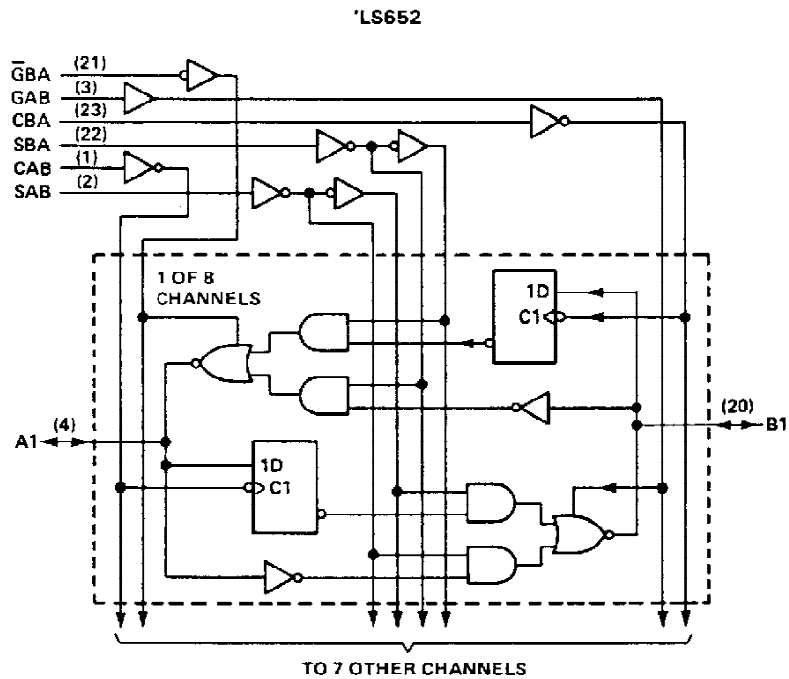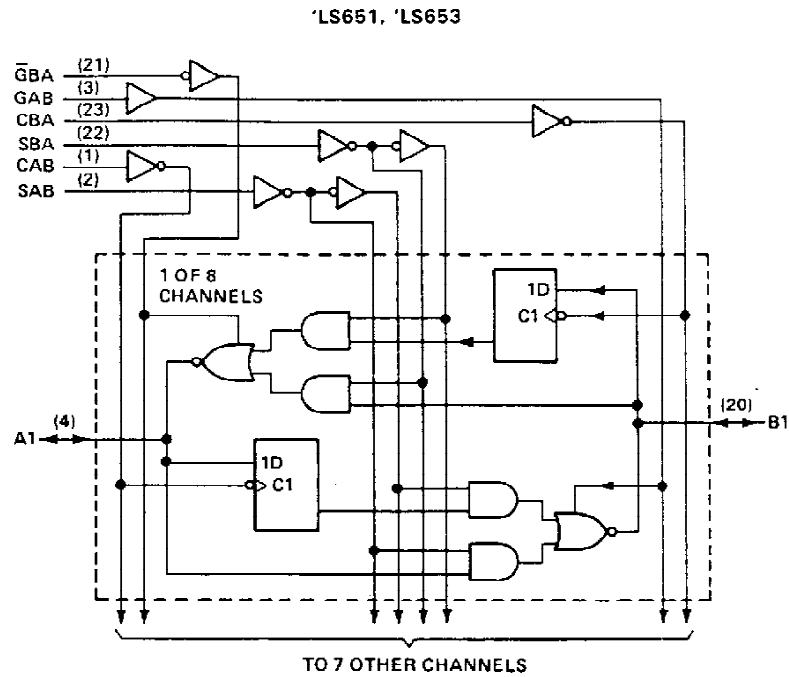

Pin numbers shown are for DW, JT or NT packages.

**SN54LS651 THRU SN54LS653
SN74LS651 THRU SN74LS653
OCTAL BUS TRANSCEIVERS AND REGISTERS**

logic symbols†

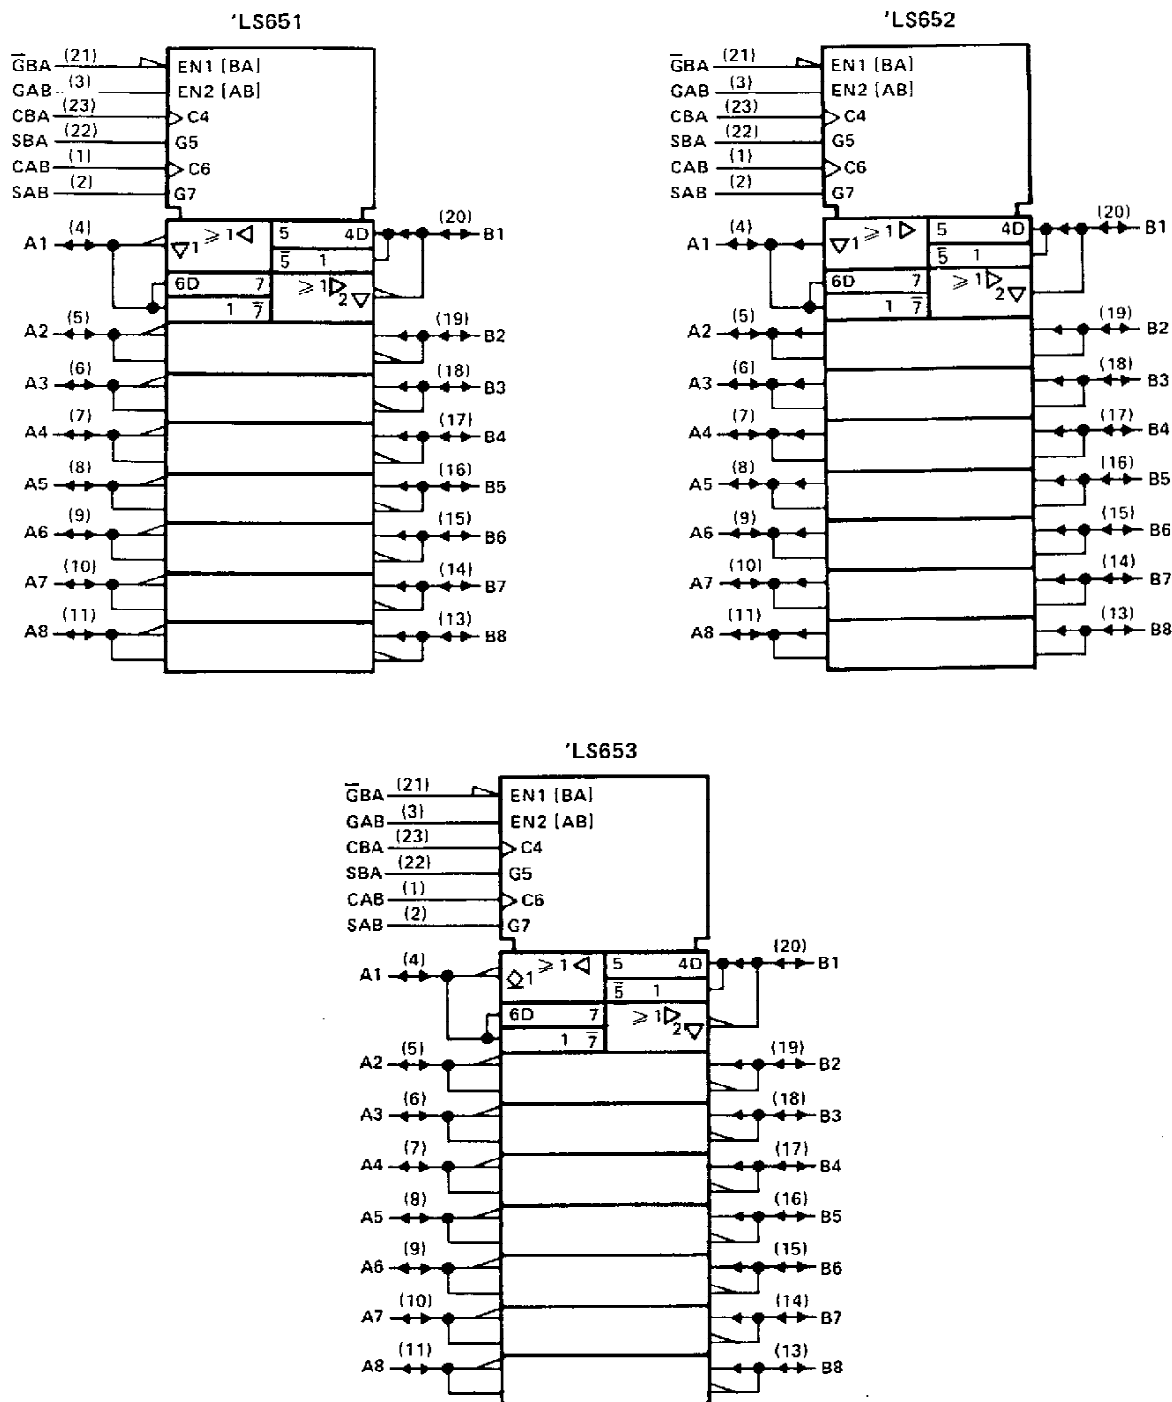

†This symbol is in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, JT, or NT packages.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS651, SN54LS652, SN74LS651, SN74LS652 OCTAL BUS TRANSCEIVERS AND REGISTERS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage: Control inputs	7 V
I/O ports	5.5 V
Operating free-air temperature range: SN54LS651, SN54LS652	- 55°C to 125°C
SN74LS651, SN74LS652	0°C to 70°C
Storage temperature range	- 65°C to 150°C

recommended operating conditions

			SN54LS651 SN54LS652			SN74LS651 SN74LS652			UNIT		
			MIN	NOM	MAX	MIN	NOM	MAX			
V _{CC}	Supply voltage		4.5	5	5.5	4.75	5	5.25	V		
V _{IH}	High-level input voltage		2			2			V		
V _{IL}	Low-level input voltage				0.7			0.8	V		
I _{OH}	High-level output current				− 12			− 15	mA		
I _{OL}	Low-level output current				12			24	mA		
t _w	Pulse duration	CBA or CAB high	15			15			ns		
		CBA or CAB low	15			15					
		Data high or low	15			15					
t _{su}	Setup time before CAB ↑ or CBA ↑	A or B	15			15			ns		
t _h	Hold time after CAB ↑ or CBA ↑	A or B	0			0			ns		
T _A	Operating free-air temperature		− 55			125			0	70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS651 SN54LS652		SN74LS651 SN74LS652		UNIT
				MIN	TYP‡	MAX	MIN	
VIK		VCC = MIN, II = - 18 mA		- 1.5		- 1.5		V
VOH		VCC = MIN, VIL = MAX, VIH = 2 V,	IOH = - 3 mA	2.4	3.4	2.4	3.4	V
			IOH = - 12 mA	2				
			IOH = - 15 mA			2		
VOL		VCC = MIN, VIL = MAX, VIH = 2 V,	IOL = 12 mA	0.25	0.4	0.25	0.4	V
			IOL = 24 mA			0.35	0.5	
II	Control inputs	VCC = MAX, VI = 7 V			0.1	0.1		mA
	A or B ports	VCC = MAX, VI = 5.5 V			0.1	0.1		
IIH	Control inputs	VCC = MAX, VI = 2.7 V		20		20		µA
	A or B ports¶			20		20		
IIL	Control inputs	VCC = MAX, VI = 0.4 V		- 0.4		- 0.4		mA
	A or B ports¶			- 0.4		- 0.4		
IOS§		VCC = MAX, VO = 0 V		- 40	- 225	- 40	- 225	mA
ICC	LS651	VCC = MAX	Outputs high	95	145	95	145	mA
			Outputs low	103	165	103	165	
			Outputs disabled	103	165	103	165	
	LS652		Outputs high	95	145	95	145	
			Outputs low	103	165	103	165	
			Outputs disabled	120	180	120	180	

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[‡] All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

[§] Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

[¶] For I/O ports, the parameters I_{IH} and I_{IL} include the off-state output current.



POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS651, SN54LS652, SN74LS651, SN74LS652

OCTAL BUS TRANSCEIVERS AND REGISTERS

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS651			'LS652			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
tPLH	Clock	Bus	R _L = 667 Ω, C _L = 45 pF, See Note 2		14	24		15	25	ns
tPHL					23	35		24	36	ns
tPLH	Bus	Bus			9	18		12	18	ns
tPHL					20	30		13	20	ns
tPLH	Select, with bus input high†	Bus			31	47		23	35	ns
tPHL					22	33		21	32	ns
tPLH	Select, with bus input low†				23	35		33	50	ns
tPHL					19	30		15	23	ns
tPZH	G̅BA	A Bus			29	44		30	45	ns
tPZL					40	60		36	54	ns
tPZH	GAB	B Bus		19	29		20	30	ns	
tPZL				26	40		25	38	ns	
tPHZ	G̅BA	A Bus	R _L = 667 Ω, C _L = 5 pF, See Note 2		25	38		25	38	ns
tPLZ					19	30		19	30	ns
tPHZ	GAB	B Bus			25	38		25	38	ns
tPLZ					19	30		19	30	ns

t_{PLH} = propagation delay time, low-to-high-level output.

t_{PHL} = propagation delay time, high-to-low-level output

t_{PZH} = output enable time to high level

t_{PZL} = output enable time to low level


t_{PHZ} = output disable time from high level

t_{PLZ} = output disable time from low level

[†] These parameters are measured with the internal output state of the storage register opposite to that of the bus input.

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.

schematics of inputs and outputs

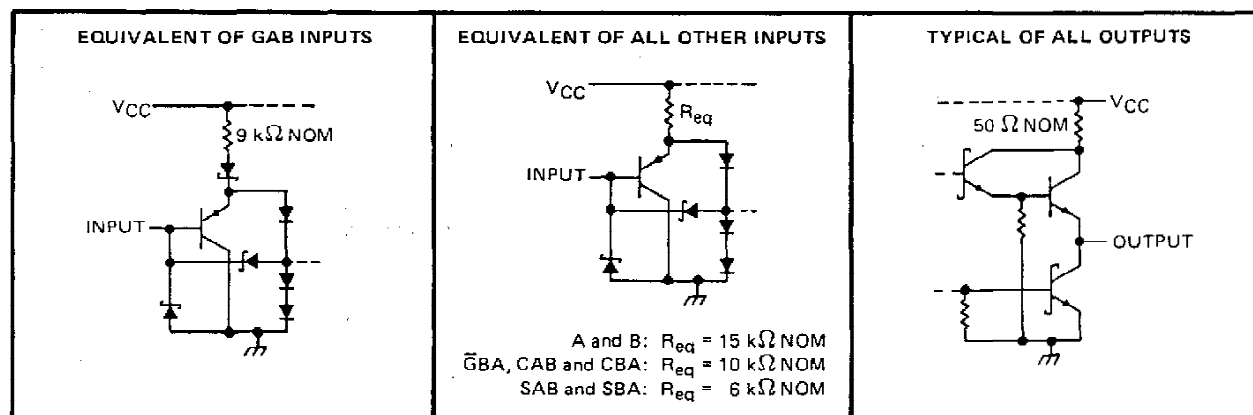

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS653, SN74LS653

OCTAL BUS TRANSCEIVERS AND REGISTERS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage: All inputs and A I/O ports	7 V
B I/O ports	5.5 V
Operating free-air temperature range: SN54LS653	-55°C to 125°C
SN74LS653	0°C to 70°C
Storage temperature range	-65°C to 150°C

recommended operating conditions

			SN54LS653			SN74LS653			UNIT		
			MIN	NOM	MAX	MIN	NOM	MAX			
V _{CC}	Supply voltage		4.5	5	5.5	4.75	5	5.25	V		
V _{IH}	High-level input voltage		2			2			V		
V _{IL}	Low-level input voltage				0.1			0.8	V		
V _{OH}	High-level output voltage	A ports			5.5			5.5	V		
I _{OH}	High-level output current	B ports			− 12			− 15	mA		
I _{OL}	Low-level output current				12			24	mA		
t _W	Pulse duration	CBA or CAB high	15			15			ns		
		CBA or CAB low	30			30					
		Data high or low	30			30					
t _{su}	Setup time before CAB ↑ or CBA ↑	A or B	15			15			ns		
t _h	Hold time after CAB ↑ or CBA ↑	A or B	0			0			ns		
T _A	Operating free-air temperature		− 55			125			0	70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS653		SN74LS653		UNIT
				MIN	TYP‡	MAX	MIN	
VIK		VCC = MIN, II = - 18 mA		- 1.5		- 1.5		V
VOH	B ports	VCC = MIN, VIH = 2 V, VIL = MAX	IOH = - 3 mA	2.4	3.4	2.4	3.4	V
			IOH = - 12 mA	2				
			IOH = - 15 mA			2		
IOH	A ports	VCC = MIN, VOH = 5.5 V		0.1		0.1		mA
VOL		VCC = MIN, VIH = 2 V, VIL = MAX	LOL = 12 mA	0.25		0.25		V
			LOL = 24 mA	0.4		0.35		
II	Control inputs	VCC = MAX, VI = 7 V		0.1		0.1		mA
	A or B ports	VCC = MAX, VI = 5.5 V		0.1		0.1		
IIH	Control inputs	VCC = MAX, VI = 2.7 V		20		20		µA
	A or B ports†			20		20		
IIL	Control inputs	VCC = MAX, VI = 0.4 V		- 0.4		- 0.4		mA
	A or B ports†			- 0.4		- 0.4		
IOS‡	B ports	VCC = MAX, VO = 0 V		- 40	- 225	- 40	- 225	mA
ICC	LS653	VCC = MAX	Outputs high	95	145	95	145	mA
			Outputs low	103	165	103	165	
			Outputs disabled	103	165	103	165	
	LS654		Outputs high	95	145	95	145	
			Outputs low	105	170	105	170	
			Outputs disabled	120	180	120	180	

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[‡] All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

[§] Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

[¶] For I/O ports, the parameters I_{IH} and I_{IL} include the off-state output current.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54LS653, SN74LS653

OCTAL BUS TRANSCEIVERS AND REGISTERS





switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH}	CBA	A Bus	R _L = 667 Ω, C _L = 45 pF, See Note 2		25	38	ns
t _{PHL}					26	39	
t _{PLH}	CAB	B Bus			15	23	ns
t _{PHL}					24	36	
t _{PLH}	A Bus	B Bus			10	18	ns
t _{PHL}					20	30	
t _{PLH}	B Bus	A Bus			21	32	ns
t _{PHL}					16	24	
t _{PLH}	SBA† (with B high)	A Bus			38	57	ns
t _{PHL}					26	39	
t _{PLH}	SBA† (with B low)	A Bus			34	51	ns
t _{PHL}					23	35	
t _{PLH}	SAB† (with A high)	B Bus			32	48	ns
t _{PHL}					22	33	
t _{PLH}	SAB† (with A low)	B Bus			24	36	ns
t _{PHL}					20	30	
t _{PLH}	G̅BA	A Bus			23	35	ns
t _{PHL}					37	55	
t _{PZH}	GAB	B Bus	R _L = 667 Ω, C _L = 5 pF, See Note 2		19	29	ns
t _{PZL}					25	38	
t _{PHZ}	GAB	B Bus			26	39	ns
t _{PLZ}					19	29	

[†]These parameters are measured with the internal output state of the storage register opposite to that of the bus input.

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.

schematics of inputs and outputs

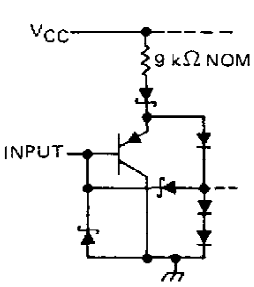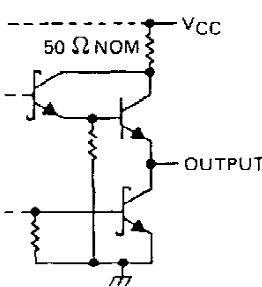EQUIVALENT OF GAB INPUTS	EQUIVALENT OF ALL OTHER INPUTS	TYPICAL OF B OUTPUTS	TYPICAL OF A OUTPUTS
	 <p>A and B: $R_{eq} = 15\text{ k}\Omega\text{ NOM}$ $\overline{G}BA$, CAB and CBA: $R_{eq} = 10\text{ k}\Omega\text{ NOM}$ SAB and SBA: $R_{eq} = 6\text{ k}\Omega\text{ NOM}$</p>		

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.